


Mounting tensioner

Tensioner for mounting the connecting link of the roller chain

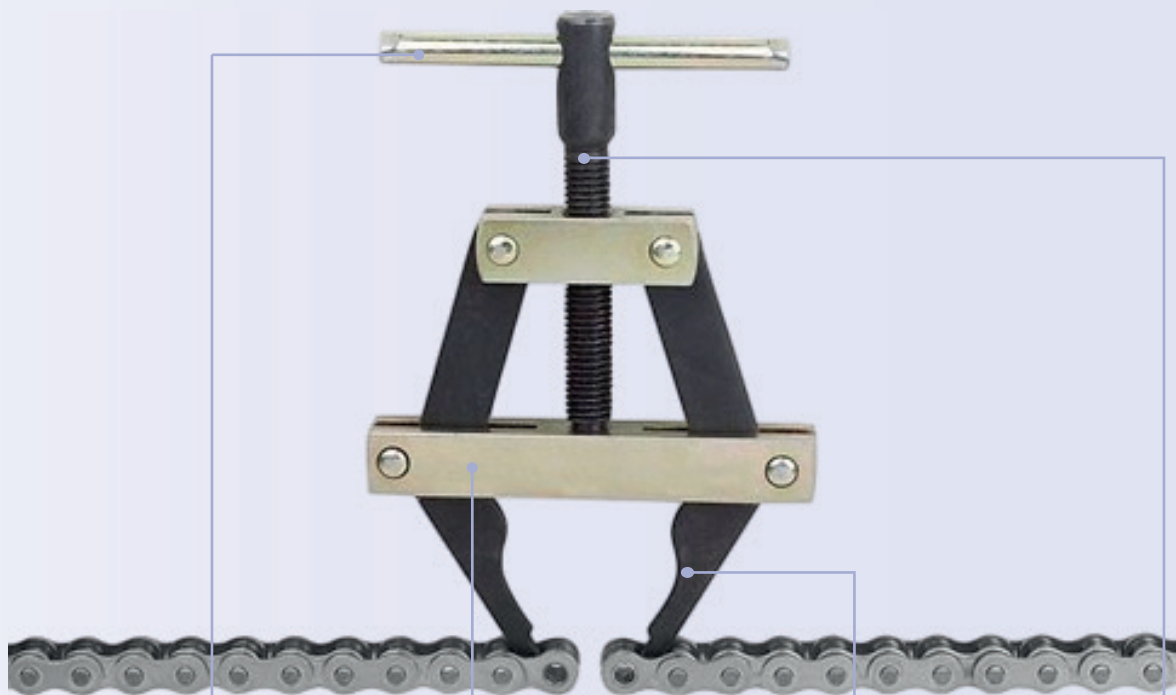

Easy and quick
handling

Wide range
available

Perfect connecting
link assembly

Controlled
movement

Mounting tensioner

These tools are used to tension chains for chain assembling. Due to a mechanical system a threaded axis will create translation by rotation. This translation will bring two ends of a chain together. This will make room for the connection link. The use of a compression spring will give the user more stability at the CMPH60-100 serie.

With its robust design, the chain mounting tool offers durability and ease of use, making it perfect for on-site chain assembly's. It is compatible with ISO and ANSI roller chains.

Technical highlights


- Available in all sizes for 6.35 mm up to 63.50 mm pitch roller chains
- Compatible with duplex and triplex chains
- Ideal for tensioning the chain and mounting the connecting link
- Controlled movement due to the use of a thread
- Made for both ISO and ANSI standards

Alternative tools

- Whale Chain breaker & Rivet Tool (breaking & riveting in one)
- Manual chain cutter available for breaking without the use of a hammer
- Specialized workshop breaking and riveting tools also available

Mounting tensioner

Tensioner for mounting the connecting link of the roller chain

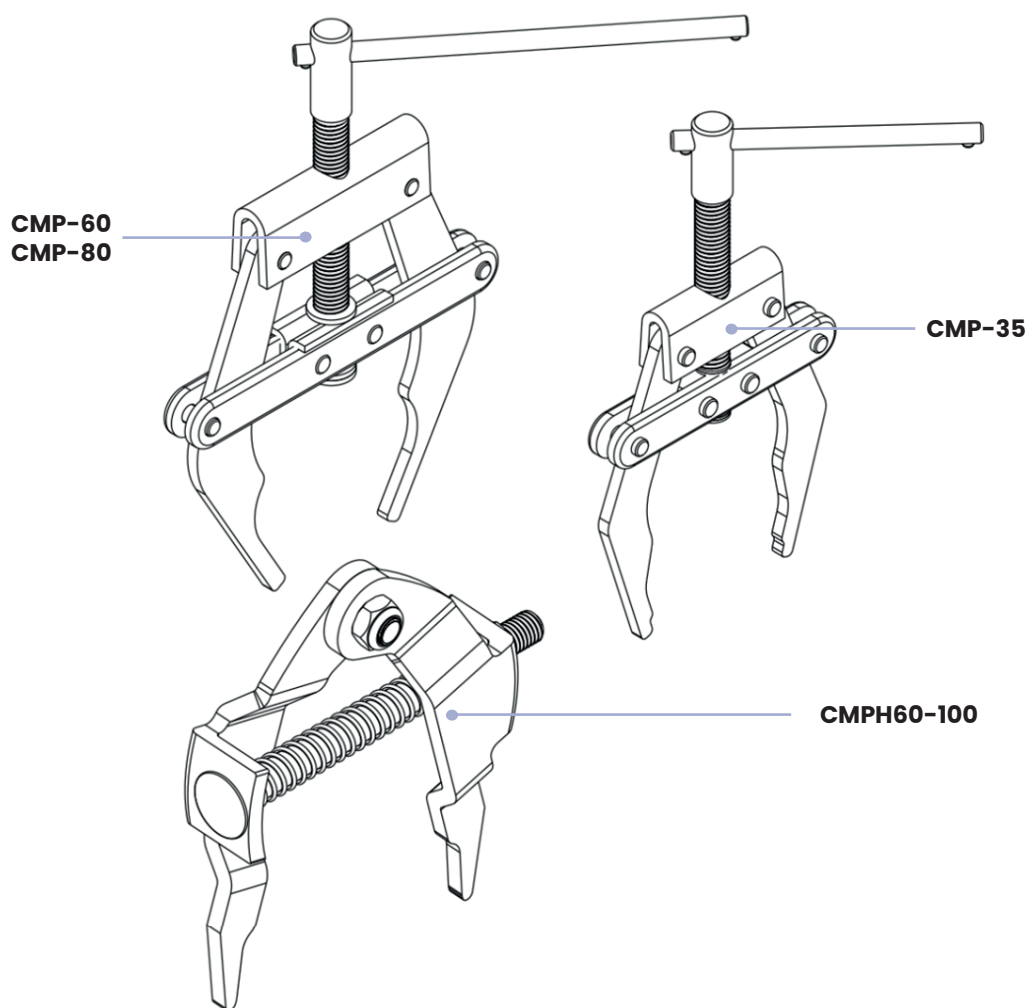

Donghua Part no.	Pitch (mm)	ISO norm	ANSI norm
CMP-35	6,350 – 19,050	06B, 08B, 10B, 12B	ASA35, ASA40, ASA50, ASA60
CMP-60	19,050 – 31,750	12B, 16B, 20B	ASA60, ASA80, ASA100
CMPH60-100	19,050 – 31,750	12B, 16B, 20B	ASA60, ASA80, ASA100
CMP-80	31,750 – 63,500	20B, 24B, 28B, 32B, 40B	ASA100, ASA120, ASA140, ASA160, ASA200

Notes

- Keep the screw well-greased for optimal performance

Contact

☎ +31(0)72 820 0120

✉ info@donghua.eu

🌐 www.donghua.eu

