


Chain breaker

Chain tool for breaking a rollerchain by hand

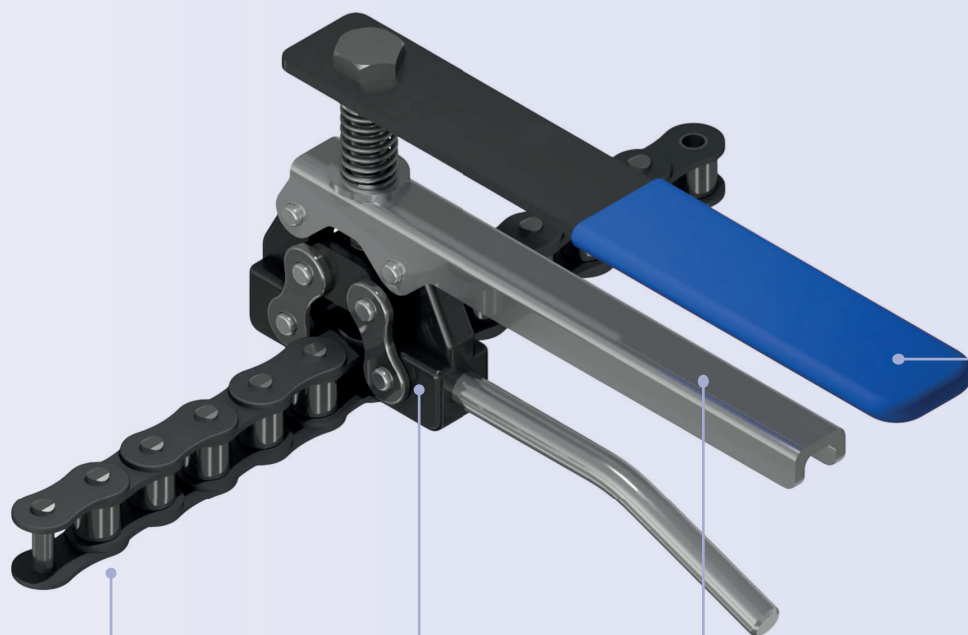

Easy and quick
handling

Wide range
available


Chain breaking
tool

Controlled
movement

Chain breaker

The Chain Breaker Tool is designed for easy and efficient chain disassembly and is available in multiple sizes to suit different applications. By applying controlled pressure to the chain pin, outer links can be removed smoothly and reliably. For optimal performance, pre-grinding the pin heads is recommended.

With its robust construction and user friendly design, this tool ensures consistent results and is perfect for on-site chain cutting.

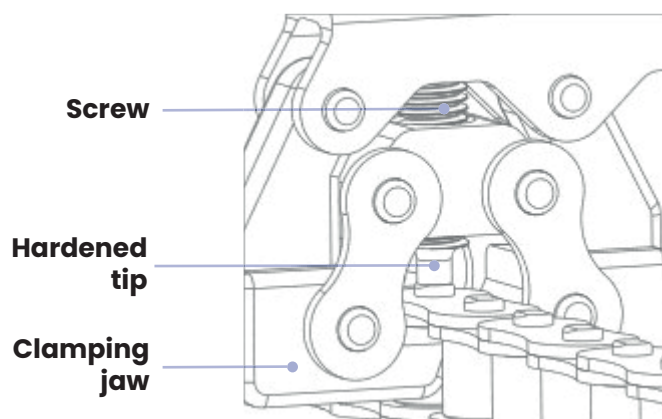


Technical highlights

- Ideal for chain disassembly on-site
- Controlled cutting movement for precision and safety
- Comes in 3 different sizes
- Ideal in combination with our EXL roller chain (no grinding needed)
- Suitable for both ISO and ANSI standards
- Available in all sizes from 3/8" up to 2" pitch
- Compatible for simplex, duplex and triplex chains
- Extra drift punch tool required

Alternative tools

- Whale chain breaker & Rivet Tool (cutting & riveting in one)
- Special workplace breakers and riveting tools are also available
- Mounting tensioner for easy connecting link assembly

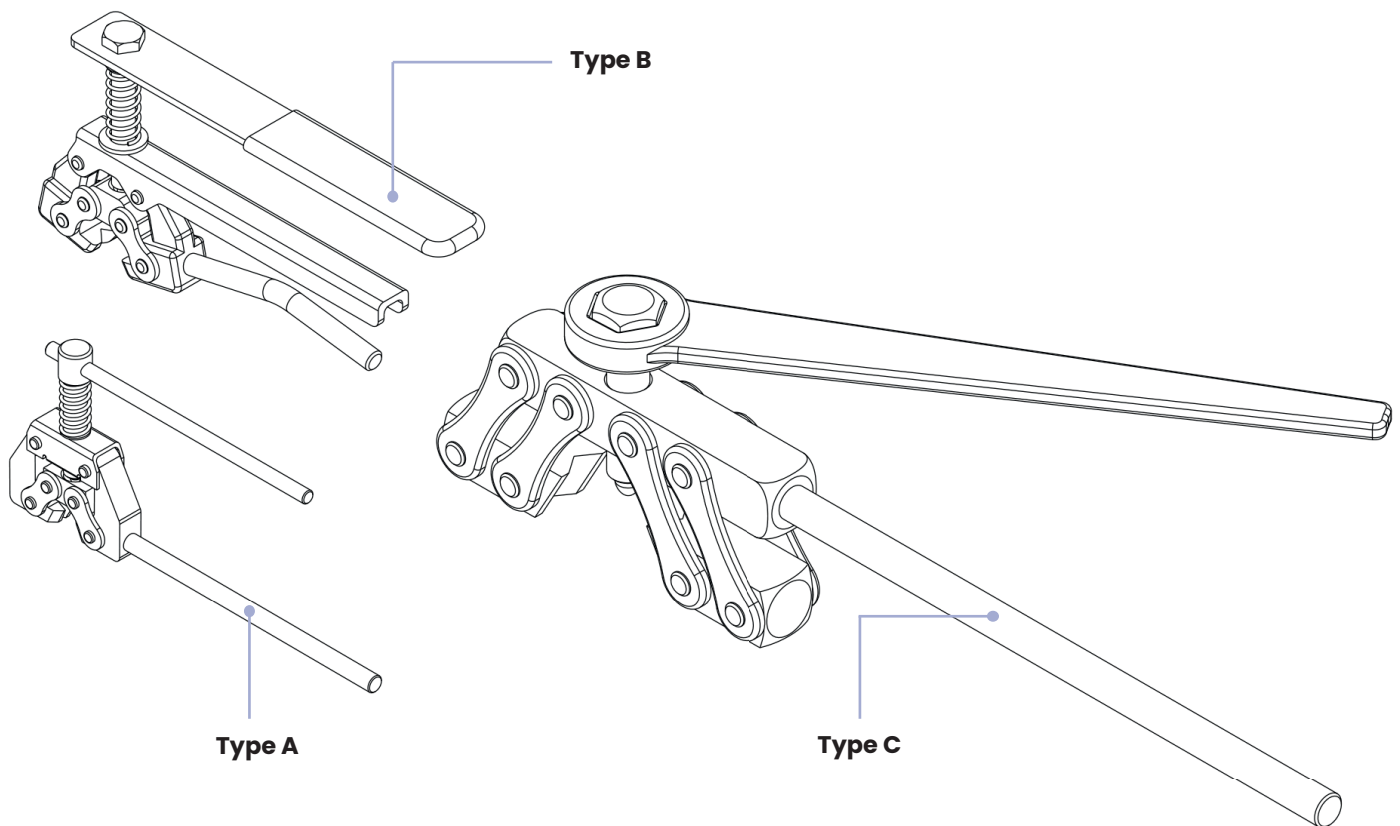

Donghua Part no.	Type	Pitch (mm)	ISO norm	ANSI norm
CCTYPE-A	A	9,525 – 15,875	06B, 08B, 10B	ASA35, ASA40, ASA50
CCTYPE-ATIP	Replacement tip (A)	9,525 – 15,875	06B, 08B, 10B	ASA35, ASA40, ASA50
CCTYPE-B	B	19,050 – 31,750	12B, 16B, 20B	ASA60, ASA80, ASA100
CCTYPE-BTIP	Replacement tip (B)	19,050 – 31,750	12B, 16B, 20B	ASA60, ASA80, ASA100
CCTYPE-C	C	38,100 – 50,800	24B, 28B, 32B	ASA120, ASA140, ASA160
CCTYPE-CTIP	Replacement tip (C)	38,100 – 50,800	24B, 28B, 32B	ASA120, ASA140, ASA160

Notes

- Keep the screw well-greased for optimal performance
- Spare tips are available

Contact

☎ +31(0)72 820 0120
 ✉ info@donghua.eu
 🌐 www.donghua.eu

